

## Operation Instructions

## Vibration Alarm MODEL: MY-106MBE

Please read these instructions carefully before use and retain for future reference.


## IMPORTANT/WARNING

- For the best result, use **alkaline** batteies and replace every 6 months
- Please remove batteries when clock is not used for a while to prevent battery leakage.
- Do not expose this item to fire, water or mositure.


## What is inside

- Clock, Alacaline AA batteries x2, and manual


## When to replace batteries

- When batteies are about to die, you will see  on the LCD display. Please replace new batteirs as soon as possible.
- When alarm sound volume becomes low or the vibration is weak.
- Even if the LCD is on, the batteries could be too weak for a vibration alarm function. Please replace new batteries when malfunction occurs

## TOP




## FRONT

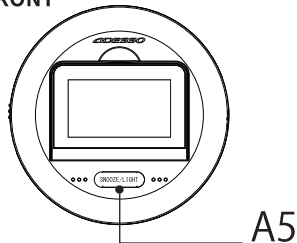


- A1: Time set button  
A2: - button  
A3: + button  
A4: Alarm set button  
A5: Snooze/Backlight button

## SIDE

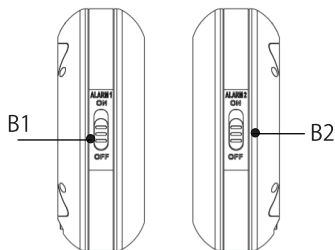




- B1: Alarm 1 ON/OFF Switch  
B2: Alarm 2 ON/OFF Switch


## BOTTOM

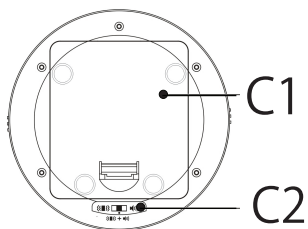

- C1: Battery compartment  
C2: Alarm function switch

- |   |                     |
|---|---------------------|
|  | Vibration           |
|  | Vibration and sound |
|  | Sound               |

## LCD

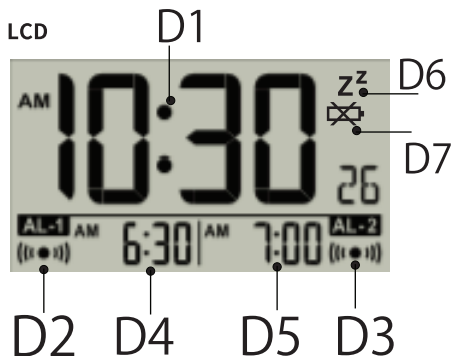

- D1: Time  
D2: Alarm 1 indicator  
D3: Alarm 2 indicator  
D4: Alarm 1 time  
D5: Alarm 2 time  
D6: Snooze indicator  
D7: Replace batteries indicator

## How to start

- Remove the battery compartment(C1) and Insert 2 attached alacaline AA batteries.

## Setting the correct time




- (1) Press and hold Time set button(A1) and then "12Hr" starts flashing.  
Press either -button(A2) or +button(A3)to choose 12 Hour or 24 Hour format.
  - (2) Press Time set button(A1) and the hour display starts flashing.  
Press either -button(A2) or +button(A3)to set the correct hour.
  - (3) Press Time set button(A1) and the minute display starts flashing.  
Press either -button(A2) or +button(A3)to set the correct minute.
  - (4) Press Time set button(A1) and the second display starts flashing.  
It becomes "0" when you press either -button(A2) or +button(A3).
  - (5) Press Time set button(A1) and the Year display starts flashing. Press either -button(A2) or +button(A3)to set the correct year.
  - (6) Press Time set button(A1) and "D" and "M" display start flashing.  
Press either -button(A2) or +button(A3)to set D/M (Day-Month) OR M/D(Month-Day)
  - (7) Press Time set button(A1) and the Month display starts flashing.  
Press either -button(A2) or +button(A3)to set the correct month.
  - (8) Press Time set button(A1) and the Day display starts flashing.  
Press Time set button(A1) to complete the setting
- ※ Press and hold -button(A2) or +button(A3)to advance faster.  
※ Make sure to set the correct AM or PM

## How to set alarm time

- (1) Press Alarm set button(A4) and Alarm 1 time (D4)starts flashing.  
Press either -button(A2) or +button(A3)to set your desired alarm time. Press Alarm set button(A4) to move alarm 2 setting.
  - (2) When Alarm 2 time (D5)is flashing, prress either -button(A2) or +button(A3)to set your desired alarm time. Press Alarm set button(A4) to complete the setting
- ※ Press and hold -button(A2) or +button(A3)to advance faster.  
※ Make sure to set the correct AM or PM

## How to switch alarm functions

- (1) Set the Alarm function switch (C2) to the left for vibration only.
- (2) Set the Alarm function switch(C2) to the middle for vibration and sound
- (3) Set the Alarm function switch (C2) to the right for sound only.

- |   |                     |
|---|---------------------|
|   | Vibration           |
|   | Vibration and sound |
|  | Sound               |

## How to enable/disable alarms

- (1) To enable alarm 1, set the Alarm 1 ON/OFF switch (B1) to "ON"  
Alarm1 indicator(D2) will appear.
  - (2) To enable alarm 2, set the Alarm 2 ON/OFF switc(B2) to "ON"  
Alarm2 indicator(D3) will be on.
- ※ Even if you set the alarm time, the alarm doesnt come on if the the Alarm ON/OFF switch (B1 and B2) is not set to "ON" .
- ※ When you dont use alarm function, set the Alarm ON/OFF swich(B1 and B2) to "OFF" Alarm indicator(D2 and D3) will disapper.

## How to stop alarms

- (1) The alarm will atomatically stop in 2 minutes.  
Alarm comes on again nect day at the same time.
- (2) With the alarm is sounding, press one of buttons on top (A1-A4) to turn off the alarm. Alarm will go off again next day at the same time.

## How to test alarm

- Press and hold -button(A2) for 3 seconds

## Snooze function

- (1) With the alarm is sounding, press the Snooze/backlight button(A5) to enable snooze mode. The alarm will go off 5 minutes later. You may repeat this cycle up to 7 times. While in snooze mode, the snooze indicator(D6) will be on.

While in snooze mode, press one of buttons on top(A1-A4) will deactivate the snooze function.

## Others

You can see the current date by pressing the Time set button(A1). It will automatically back to the current time display in 15 seconds.

Press the Snooze/Backlight button to see the LCD display in the dark. The backlight will be on for 5 seconds

